




SMD EMI Suppression Ferrite Bead Size 1812



- Monolithic inorganic material construction.
 - Closed magnetic circuit avoids crosstalk.
 - Suitable for reflow soldering.
 - Available in various sizes.
 - Quantity: 1000pcs
-
- Data lines and low power lines
 - Connection between digital and analog circuit

Dimensions: [mm]

Land Pattern: [mm]

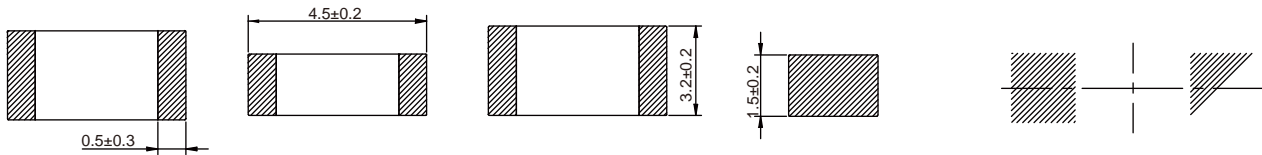

Electrical Properties:

| | () | | (max) () | Current (max) (mA) |
|--|-----|------|--------------|-----------------------|
| | | ±25% | | |
| | | ±25% | | |
| | | ±25% | | |
| | | ±25% | | |
| | | ±25% | | |
| | | ±25% | | |

Operating Temperature: -55°C ~ +125°C

Temperature rise current the actual value of DC current when the temperature rise is T40C



Impedance & Frequency Characteristics:

