


MDE Series
Molding Power Inductors
Size 1050



	0.22	±20%
	1.00	±20%
	1.50	±20%
	2.20	±20%
	3.30	±20%
	4.70	±20%
	5.60	±20%
	6.80	±20%
	10.0	±20%
	15.0	±20%
	22.0	±20%
	33.0	±20%
	47.0	±20%
	100	±20%

Saturation Current will cause L to drop approximately 20%
 Temperature Rise Current: The actual value of D




Electrical Properties:



Typical Electrical Characteristics:

Inductance vs DC Current Characteristics:

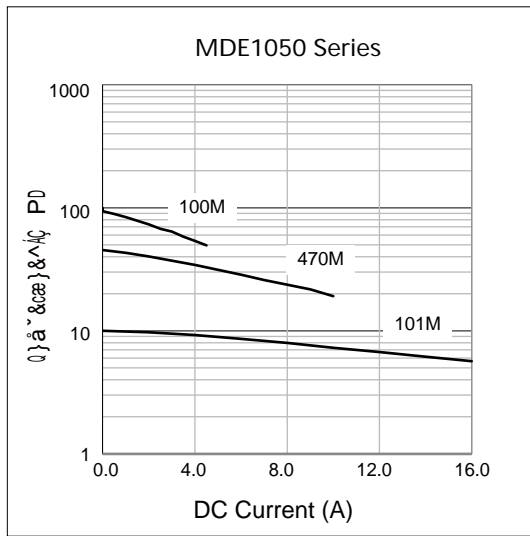

Temperature Rise vs DC Current Characteristics:

