

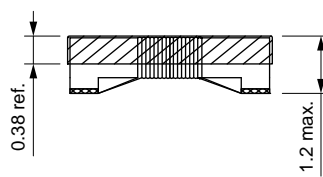


- Ceramic core wire wound construction with high Q and high SRF
- Small size and small tolerance available
- AEC-Q200 qualified
- Lead-free reflow soldering as referenced in JEDEC J-STD 020D and RoHS compliant
- Operating Temperature: -55~+125°C (Including self-temperature)
- Qualified

- 
- 
- 
- 
- 
- 
- 

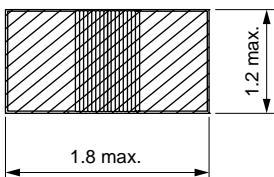


|                 | Inductance | Test Frequency | Test Frequency |
|-----------------|------------|----------------|----------------|
|                 | 2.0        | 0.1V/250M      | 250            |
| WCIV1608HF-3N9□ | 3.9        | 0.1V/250M      | 250            |
| WCIV1608HF-4N7□ | 4.7        | 0.1V/250M      | 250            |
| WCIV1608HF-6N8□ | 6.8        | 0.1V/250M      | 250            |
| WCIV1608HF-8N2□ | 8.2        | 0.1V/250M      | 250            |
| WCIV1608HF-10NJ | 10         | 0.1V/250M      | 250            |
| WCIV1608HF-12NJ | 12         | 0.1V/250M      | 250            |
| WCIV1608HF-15NJ | 15         | 0.1V/250M      | 250            |
| WCIV1608HF-18NJ | 18         | 0.1V/250M      | 250            |
| WCIV1608HF-22NJ | 22         | 0.1V/250M      | 250            |
| WCIV1608HF-24NJ | 24         | 0.1V/250M      | 250            |

| Part No         | Inductance | Tolerance | Test Frequency | Q Min. | Test Frequency | Temperature Rise Current Max. | DC Resistance Max. | SRF Min. |
|-----------------|------------|-----------|----------------|--------|----------------|-------------------------------|--------------------|----------|
| WCIV1608HF-27NJ | 27         | ±5%       | 0.1V/250M      | 40     | 250            | 600                           | 0.14               | 2800     |
| WCIV1608HF-33NJ | 33         | ±5%       | 0.1V/250M      | 40     | 250            | 600                           | 0.22               | 2300     |
| WCIV1608HF-39NJ | 39         | ±5%       | 0.1V/250M      | 40     | 250            | 600                           | 0.30               | 2200     |
| WCIV1608HF-47NJ | 47         | ±5%       | 0.1V/200M      | 38     | 250            | 600                           | 0.35               | 2000     |
| WCIV1608HF-56NJ | 56         | ±5%       | 0.1V/200M      | 38     | 250            | 600                           | 0.37               | 1900     |
| WCIV1608HF-68NJ | 68         | ±5%       | 0.1V/200M      | 37     | 250            | 600                           | 0.43               | 1700     |
| WCIV1608HF-72NJ | 72         | ±5%       | 0.1V/150M      | 34     | 250            | 400                           | 0.42               | 1700     |
| WCIV1608HF-82NJ | 82         | ±5%       | 0.1V/150M      | 34     | 250            | 400                           | 0.71               | 1700     |
| WCIV1608HF-R10J | 100        | ±5%       | 0.1V/150M      | 34     | 250            | 400                           | 0.78               | 1400     |
| WCIV1608HF-R12J | 120        | ±5%       | 0.1V/150M      | 32     | 250            | 300                           | 0.84               | 1300     |
| WCIV1608HF-R15J | 150        | ±5%       | 0.1V/150M      | 28     | 250            | 280                           | 0.96               | 990      |
| WCIV1608HF-R18J | 180        | ±5%       | 0.1V/100M      | 25     | 250            | 240                           | 1.52               | 990      |
| WCIV1608HF-R22J | 220        | ±5%       | 0.1V/100M      | 25     | 250            | 200                           | 2.02               | 900      |
| WCIV1608HF-R27J | 270        | ±5%       | 0.1V/100M      | 24     | 250            | 170                           | 2.36               | 900      |
| WCIV1608HF-R33J | 330        | ±5%       | 0.1V/100M      | 24     | 250            | 185                           | 3.40               | 700      |
| WCIV1608HF-R39J | 390        | ±5%       | 0.1V/100M      | 24     | 250            | 100                           | 3.60               | 900      |

Inductance Tolerance: C=±0.2nH, S=±0.3nH, J=±5%

## Typical Electrical Characteristics:

Inductance VS. Frequency Characteristics:

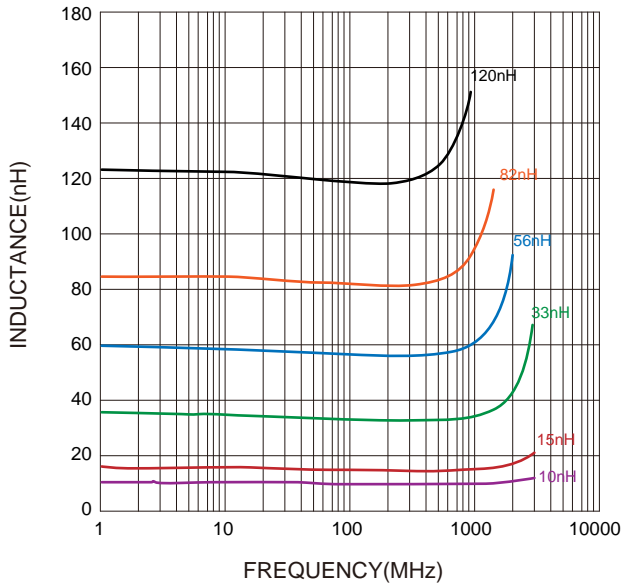

Q VS. Frequency Characteristics:

