

WI Series

SMD Power Inductor

Size 4532


CHARACTERISTICS

- $b_{12} \Omega \Psi \dot{\phi} \dot{\sigma} \dot{\omega} \dot{\rho} \dot{\chi} \dot{\omega} \dot{1} \dot{1} \dot{1} \dot{v} \dot{\phi} \dot{1} \dot{1} \dot{1} \dot{\omega} \dot{\sigma} \dot{\xi} \dot{\eta} \dot{\sigma} \dot{\omega} \dot{\phi} \dot{1}$
- $5 \dot{\omega} \dot{\rho} \dot{\sigma} \dot{\omega} \dot{\omega} \dot{\omega} \dot{\sigma} \dot{\omega} \dot{\omega} \dot{\sigma} \dot{1} \dot{\omega} \dot{\sigma} \dot{\chi} \dot{\omega} \dot{\sigma} \dot{\omega} \dot{\sigma} \dot{\eta} \dot{\omega} \dot{\omega} \dot{1} \dot{\omega} \dot{\sigma} \dot{\sigma} \dot{1} \dot{\phi} \dot{1} \dot{\rho} \dot{1} \dot{\omega} \dot{\rho} \dot{\sigma}$
- $v \dot{\eta} \dot{1} \dot{\omega} \dot{\Gamma} \dot{\omega} \dot{1} \quad \mu \dot{\omega} \dot{\sigma}$

APPLICATION

- [ύΧ μύΧξο 5/ 5/ όύΩΦξούξο
- CΠPύξο
- DξΩξο†P όοοόΉού †μμPόό†ΓύΩ


Dimensions: [mm]

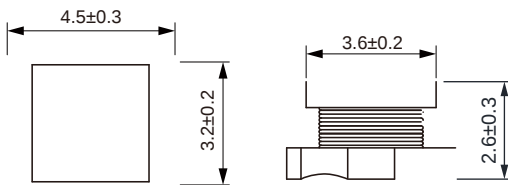

Land Pattern: [mm]

Electrical Properties:

165°-180°



Reel Dimension: [mm]

Packaging Quantity:

500 Pcs/Reel

5 Reel /Inner box(2.5K Pcs)

8 Inner box/Carton box(20K Pcs)

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components.The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does.As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.